



→ Introductions

By switch signals controlling, this isolated safety barrier transfers the digital signals (wet contact) from a safe area

→ Support model type

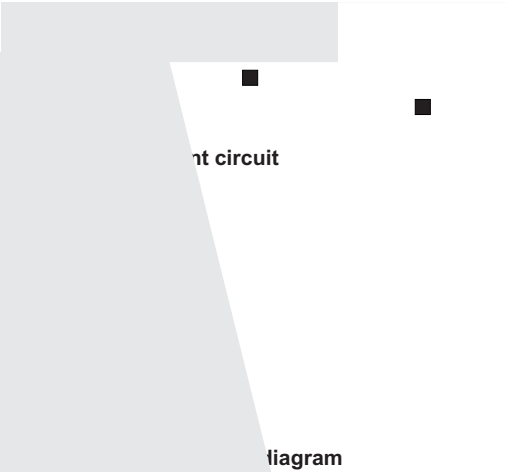

Double input, double output

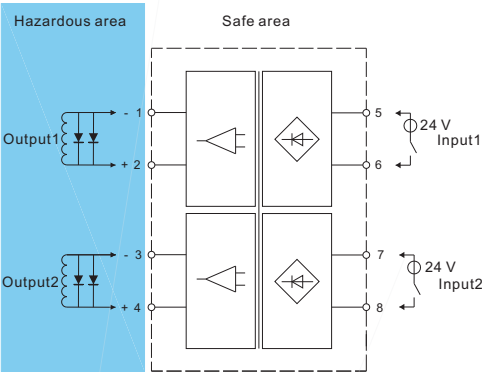

Insulation

Parameters

Inspection Center

Instrumentation (NEPSi,

U_m: 250 V

Terminals 1, 2; Terminals 3, 4:

U_o: 25.2 V I_o: 117 mA P_o: 738 mW C_o: 0.1 μF

Ambient conditions:

Operation temperature: -20 °C ~ +60 °C

Relative humidity: 10% RH ~ 90% RH (40 °C)

Atmosphere pressure: 80 kPa ~ 106 kPa

Storage temperature: -40 °C ~ +80 °C

Nanjing New Power Electric Co., Ltd.

