


TC Temperature Transmitter

NPWD-CD11D.TC

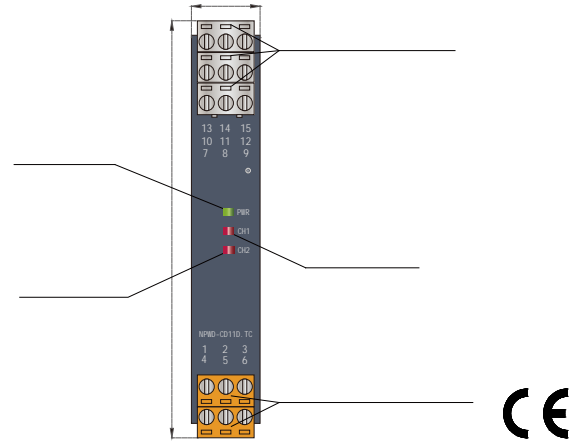

Parameters

550 $< [(U-3)/0.02] ;$

-20


500 ms

1500 V AC (Input/Output/Power supply)

100 M (Input/Output/Power supply)

(25°C±2°C,

Wiring diagram

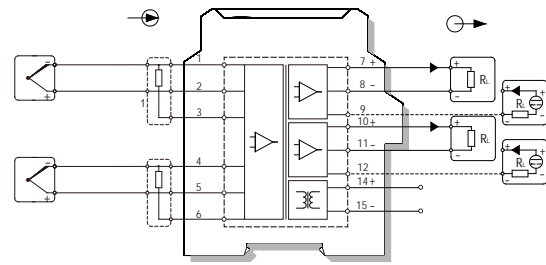

Model rules



Standards	Type	Range	Min.span/Accuracy
IEC 60584-1			±0.3°C; 300 ±0.1% F.S.
			±0.3°C; 300 ±0.1% F.S.
			±0.3°C; 300 ±0.1% F.S.
			±0.3°C; 300 ±0.1% F.S.
			±0.3°C; 300 ±0.1% F.S.
			±0.3°C; 300 ±0.1% F.S.
		-50	500 ±0.5°C; 500 ±0.1% F.S.
		-50	500 ±0.5°C; 500 ±0.1% F.S.
			500 ±0.5°C; 500 ±0.1% F.S.
ASTM E988-96	W5Re-W26Re	~2315°C	500 ±0.5°C; 500 ±0.1% F.S.
	W3Re-W25Re	~2315°C	500 ±0.5°C; 500 ±0.1% F.S.
GOST R8.585			±0.3°C; 300 ±0.1% F.S.

2	1 ~ 5 V
4	0 ~ 5 V
5	0 ~ 10 V