


4 ~ 20 mA

PC

18V DC ~ 60V DC
0.8W (24V)
1.2W (24V)

/ 4 ~ 20mA
R_L ≥ 550 Ω
R_L < [(U-3)/0.02] Ω; U
1°C (-20°C ~ +60°C)
30ppm/°C
≤ 500ms
IEC 61326-3-1
≤ 3000V AC (/)
≤ 1500V AC (/)
≤ 100MΩ (/ /)
-20°C ~ +60°C
-40°C ~ +80°C
17.8mm× 110mm× 117mm
4mA~20mA NE43

0 1 2 A B
C T4 ~ T6

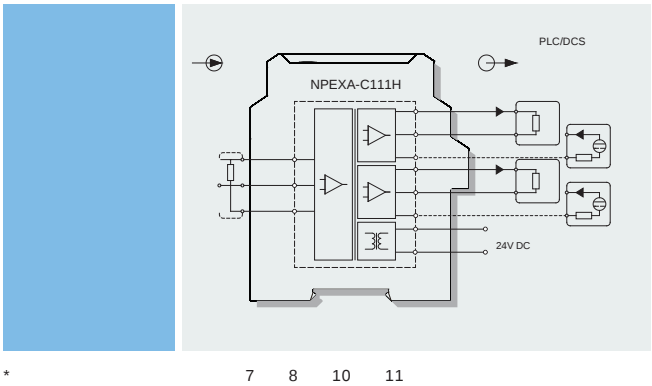

(CQST)

[Ex ia Ga] C
(Um) 250V
(1 2)
U₀=8.7V, I₀=33mA, P₀=72mW
C₀=3.58μF, L₀=21mH

NPEXA-C1□□H□

PB
1
1

1	4~20mA
2	1~5V
3	0~10mA
4	0~5V
5	0~10V
6	0~20mA