


→
/
/
()

C



→
: [Ex ia Ga] IIC [Ex ia Da] IIIC
:
(14+ 15-)
18V DC ~ 60V DC (24V DC)
(1 2 3 4 5 6):
:
≤ 20 Ω/
(7 8 9 10 11 12):
4 mA ~ 20 mA 20 ~ 4 mA
0(4) mA ~ 20 mA 0 mA ~ 10 mA 20 ~ 4 mA
0(1) V ~ 5 V 0 V ~ 10 V

4 ~ 20 mA NAMUR NE43
:
≤ 5 mV_{rms} (250 Ω)
:
R_L ≤ [(U-3)/0.02]Ω U
0(4) mA~20 mA
0(1) V ~ 5 V: ≥ 1 MΩ 0 V ~ 10 V: ≥ 2 MΩ

(25 °C ± 2 °C):

Nanjing New Power Electric Technology Co., Ltd.



× × : 17.8mm×110mm×117mm




/

/

/

/

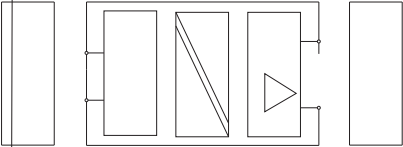

→ BUS



DIN IEC 60715 35mm



A. BUS DIN 35

D.



B. DIN BUS BUS

C.



○ PWR: ()
○ CH1 CH2: ()
1 2 LED
LED RTD ()
LED TC LED



○ IP20 ()

○ IEC/EN 60664-1 2

○ IEC 61000-4

